

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 December 2000 (21.12.2000)

PCT

(10) International Publication Number
WO 00/77926 A1

- (51) International Patent Classification⁷: H03H 1/00, G01R 33/28 (74) Agent: BAKKER, Hendrik; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: PCT/EP00/05014 (81) Designated State (national): JP.
- (22) International Filing Date: 31 May 2000 (31.05.2000) (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 99201877.0 14 June 1999 (14.06.1999) EP
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor: VRIJHEID, Johan, E., W.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 00/77926 A1

(54) Title: MRI APPARATUS PROVIDED WITH ANTI-INTERFERENCE SUPPLY CONDUCTORS FOR ELECTRICAL CONNECTION EQUIPMENT

(57) Abstract: In medical MRI apparatus it is often desirable to maintain a connection with the patient (58) to be examined, for example in order to observe the patient by means of a television camera (62) or to monitor physical functions like the heart rate or blood pressure. It is often necessary to use electrically powered connection equipment (62, 64) which is located in or very close to the imaging area (29), the supply lines (66, 68) also being located in the imaging area so that the (precisely defined) fields required for imaging would be disturbed thereby. According to the invention the supply lines are subdivided into segments (72-i), each of which has a length shorter than 1/4 of the wavelength of the RF field; these segments are separated from one another by inductances (74-i). Consequently, the supply line does not present itself as an energy absorbing conductor to the RF field, so that the RF field is not disturbed thereby. Distortion of the uniform B field is avoided by twisting the conductors (78, 80) of the line and by winding the inductances in a bifilar winding mode.

MRI apparatus provided with anti-interference supply conductors for electrical connection equipment.

The invention relates to an MRI apparatus for forming an image of an object to be examined in a measuring volume of the apparatus, which apparatus includes a field magnet for generating a uniform field in the measuring volume of the apparatus,

5 an RF transmission aerial for transmitting RF radiation of a given wavelength to the object to be examined, and

electrical connection equipment for maintaining a connection with the object to be examined, said connection equipment being coupled to a region outside the measuring volume by means of a conductor provided with frequency-dependent elements.

10 An apparatus of this kind is known from United States patent No. 5,602,478. As is customary for MRI equipment, the object to be examined according to the cited patent is formed by a patient; a part of the body of such a patient is to be imaged. As is generally known, the generation of the electromagnetic fields causes an unpleasant noise in MRI equipment. In order to suppress such noise, the known MRI apparatus is provided with
15 electrical connection equipment for maintaining a connection with the patient, the connection equipment in said known apparatus being formed by a headset whereby anti-noise is produced. The headset is coupled to a signal generator which is situated in the region outside the measuring volume. Said coupling is realized via an electrical conductor which consists of two cores and a conductive envelope. In order to prevent undesirable influencing of the
20 imaging by means of the MRI apparatus, the conductor is provided with frequency-dependent elements in the form of a filter circuit which includes a number of filters tuned to a number of frequencies of the RF radiation. Each of these filters is formed as a series connection of an inductance and a capacitor and is arranged between a ground point and a point of the associated conductor which is situated at such a distance from the headset that this distance
25 corresponds to $\frac{1}{4}$ wavelength of the RF radiation whereto the relevant filter is tuned. This means that the interference-suppressing effect of said filters is effective for a few, predetermined frequencies only.

The headset used in the known apparatus is a passive element, i.e. the headset does not receive electrical power from outside the measuring volume. However, there is an

increasing need for electrical connection equipment for maintaining a connection with the patient to be examined which is capable of receiving electrical power supply energy, such as sensors for monitoring the physical condition of the patient or a TV camera for observing the patient, and the associated lighting.

5 It is an object of the invention to provide an MRI apparatus of the kind set forth wherein electrical connection equipment with active elements can be used without causing a disturbance of the image for a wide range of radio frequencies used in the apparatus. To this end, the MRI apparatus according to the invention is characterized in that the conductor which couples the connection equipment to the region outside the measuring
10 volume is constructed as a low-frequency conductor for the supply signals of low frequency, relative to the frequency of the RF radiation, to and from the connection equipment,

said low-frequency conductor including segments (72-i) which are separated from one another and each of which is shorter than $\frac{1}{4}$ of the wavelength of said RF radiation, the separation between the segments being realized by frequency-dependent
15 separating elements which constitute a conductor for said low frequencies and an isolator for RF alternating current.

Taking these steps allows for the use of active connection equipment which is fed via a conductive connection, no disturbing effect being exerted by the low-frequency conductors for as long as the segments are significantly shorter than the wavelength of the RF
20 radiation used in the MRI apparatus.

Each of the separated segments in an advantageous embodiment of the invention is shorter than $\frac{1}{20}$ of the wavelength of said RF radiation. It has been found in practice that such a choice of the length of the segments results in an effect on the MR image which is negligibly small for all practical purposes.

25 The separating elements in a further embodiment of the invention are formed by inductances which do not contain a ferromagnetic material.

As a result of this step, field concentration in the inductance elements cannot exert an adverse effect on the homogeneity and/or the strength of the homogeneous field generated by the MRI apparatus.

30 The inductances in another embodiment of the invention are formed in that the input core and the output core in the low-frequency conductor are wound so as to form bifilar wound coils.

As a result of this step, the input core and the output core in the low-frequency conductor will not generate a field outside the inductance elements which could have an

adverse effect on the homogeneity and/or the strength of the homogeneous field generated by the MRI apparatus.

The segments in another embodiment of the invention are formed by mutually twisted cores.

5 As a result of this step, the input and output cores in the low-frequency conductor again will not generate a field which would have an adverse effect on the homogeneity and/or the strength of the homogeneous field generated by the MRI apparatus.

The invention will be described in detail hereinafter with reference to the Figures in which corresponding elements are denoted by corresponding reference numerals.

10 Therein:

Fig. 1 is a diagrammatic representation of the general construction of a magnetic resonance imaging apparatus in which the invention can be used;

Fig. 2 is a more detailed representation of the measuring volume of the magnetic resonance imaging apparatus shown in Fig. 1;

15 Fig. 3 is a diagrammatic representation of a low-frequency conductor according to the invention for delivering electrical low-frequency signals, such as power supply energy to connection equipment in the measuring volume, which low-frequency conductor is provided with inductance elements.

The magnetic resonance imaging apparatus shown in Fig. 1 includes a first
20 magnet system 1 for generating a uniform, steady magnetic field B, a second magnet system 3 for generating magnetic gradient fields, a power supply source 5 for the first magnet system 1, and a power supply source 7 for the second magnet system 3. An RF coil 9 serves to generate an RF magnetic alternating field; to this end it is connected to an RF transmission device which includes an RF source 11. The RF coil 9 can also be used for the detection of
25 spin resonance signals generated by the RF transmission field in an object to be examined (not shown); to this end, the RF coil is connected to an RF receiving device which includes a signal amplifier 13. The output of the signal amplifier 13 is connected to a detector circuit 15 which is connected to a central control device 17. The central control device 17 also controls a modulator 19 for the RF source 11, the power supply source 7 and a monitor 21 for display.
30 An RF oscillator 23 controls the modulator 19 as well as the detector 15 which processes the measuring signals. The forward and return RF signal traffic are separated from one another by a separation circuit 14. A cooling device 25 with cooling ducts 27 serves to cool the magnet coils of the first magnet system 1. The RF coil 9, arranged within the magnet systems 1 and 3, encloses a measuring volume 29 which is large enough to enclose a patient to be

examined or a part of a patient to be examined, for example the head and the neck, in an apparatus for forming medical images. Thus, a steady magnetic field B, gradient fields which select object slices, and a spatially uniform RF alternating field can be generated in the measuring volume 29. The RF coil 9 is capable of combining the functions of transmitter coil and measuring coil. It is also possible to use different coils for these two functions; for example, surface coils then act as measuring coils. The assembly formed by the coils 1, the coil 9 and the second magnet system (gradient coils) 3 is enclosed by an RF-field shielding Faraday cage 31.

A supply line 50-1 extends from the power supply source 7 to the feedthrough device 30; furthermore, a supply line 50-2 extends from the power supply source 5 to the feedthrough device 30. The central control device 17 and the various parts to be controlled (not shown) in the MRI apparatus within the Faraday cage 31 are interconnected by way of connection leads 32 which are connected to such parts to be controlled via the feedthrough device 30. Furthermore, an RF connection line 34 is arranged between the separation circuit 14 and the feedthrough device. Inside the Faraday cage the supply line 50-1 continues as a connection lead 46-1 and the supply line 50-2 continues as a connection lead 46-2. The bundle of connection leads 32 continues as a bundle of connection lines 56 within the Faraday cage.

Fig. 2 is a more detailed representation of the measuring volume of the MRI apparatus shown in Fig. 1. For the sake of clarity, this Figure shows only two coils of the first magnet system 1 for generating a uniform, steady magnetic field B. A patient 58 is arranged on a patient table 60 within the measuring volume 29 in such a manner that slice images can be formed of the head and the neck. Within or in the direct vicinity of the measuring volume 29 there is arranged electrical connection equipment for maintaining a connection with the patient to be examined, said equipment in this case being a TV camera 62 and a lamp 64 for illuminating the field of view of the camera. It is to be noted, however, that other electrical connection equipment may also be arranged within or near the measuring volume, for example sensors for measuring the blood pressure, the heart beat or the cerebral activity of the patient, or for carrying out two-way communication with the patient.

The television camera 62 and the lamp 64 receive power supply energy from the power supply apparatus 7 via a respective supply conductor 66, 68. The two supply conductors 66 and 68 extend through the uniform magnetic field B and through the RF field generated by the coils 9. According to the invention steps are taken so as to prevent the RF field generated by the coils 9 and/or the uniform magnetic field B from being disturbed so

that the quality of the slice images to be formed by means of the MRI apparatus would be adversely affected. The supply conductors in which such steps are incorporated will be described in detail hereinafter with reference to Fig. 3.

Fig. 3 shows a supply conductor, for example the supply conductor 66 for supplying the television camera with electrical power supply energy. This supply conductor 66 includes segments 72-1, 72-2, ... 72-i, ... which are separated from one another and each of which is shorter than one quarter of the wavelength of said RF radiation, preferably shorter than $1/20$ of said wavelength. The separation between the segments is realized by way of inductance elements 74-1, 74-2, ..., 74-i, As is known, inductance elements are frequency-dependent separating elements which constitute a conductor for direct current and an isolator for RF alternating current. The frequency used for the RF field generated by the coils 9 is of the order of some tens of MHz and typically amounts to, for example 64 MHz. This frequency corresponds to a wavelength of approximately 469 cm, so that the segments 72-i have a length of approximately $469/20 \approx 23$ cm. Said segments are constructed in the form of two cores which are twisted one around the other, with the result that the supply current flowing through these cores does not generate a noticeable magnetic field outside the supply conductor.

Fig. 3 shows an inductance element in greater detail. Such inductance elements 74-i are constructed as coils wound on a former 76 which does not interact with the RF field and with the uniform B field, so that this former cannot disturb said fields. A suitable material for such a coil former is, for example polycarbonate. The two cores 78 and 80 of the supply conductor are wound on the former 76 in such a manner that the magnetic fields generated by the current in these cores compensate one another to a high degree so that these coils do not generate a noticeable field. This effect is achieved by arranging the two cores directly adjacent one another on the former in such a manner that the currents in these two cores oppose one another. This is referred to as a bifilar winding. It is a further effect of the bifilar winding that the RF field cannot generate currents in the supply conductor, because the inductance has a high impedance for such currents (which would present themselves in the common mode, i.e. such currents would have the same direction in the two cores 78 and 80). As a result of said choice of the length of the segments, separated by inductances having a high impedance for said RF frequency, such segments cannot take up energy from the RF field so that they cannot noticeably disturb said field.

CLAIMS:

1. An MRI apparatus for forming an image of an object (58) to be examined in a measuring volume (29) of the apparatus, which apparatus includes
a field magnet (1) for generating a uniform field (B) in the measuring volume of the apparatus,
5 an RF transmission aerial (9) for transmitting RF radiation of a given wavelength to the object to be examined, and
electrical connection equipment (62, 64) for maintaining a connection with the object to be examined, said connection equipment being coupled to a region outside the measuring volume by means of a conductor (66, 68) provided with frequency-dependent
10 elements,
characterized in that
the conductor (66, 68) which couples the connection equipment (62, 64) to the region outside the measuring volume (29) is constructed as a low-frequency conductor for the supply of signals of low frequency, relative to the frequency of the RF radiation, to and from
15 the connection equipment,
said low-frequency conductor including separated segments (72-i) which are separated from one another and each of which is shorter than $1/4$ of the wavelength of said RF radiation,
the separation between the segments being realized by frequency-dependent
20 separating elements (74-i) which constitute a conductor for said low frequencies and an isolator for RF alternating current.
2. An MRI apparatus as claimed in Claim 1, wherein each of the separated segments is shorter than $1/20$ of the wavelength of said RF radiation.
- 25 3. An MRI apparatus as claimed in Claim 1 or 2, wherein the separating elements are formed by inductances which do not contain a ferromagnetic material.

4. An MRI apparatus as claimed in Claim 3, wherein the inductances are formed in that the input core and the output core (78, 80) in the supply conductor are wound so as to form bifilar wound coils.
- 5 5. An MRI apparatus as claimed in one of the preceding Claims, wherein the segments are formed by mutually twisted cores.

1/2

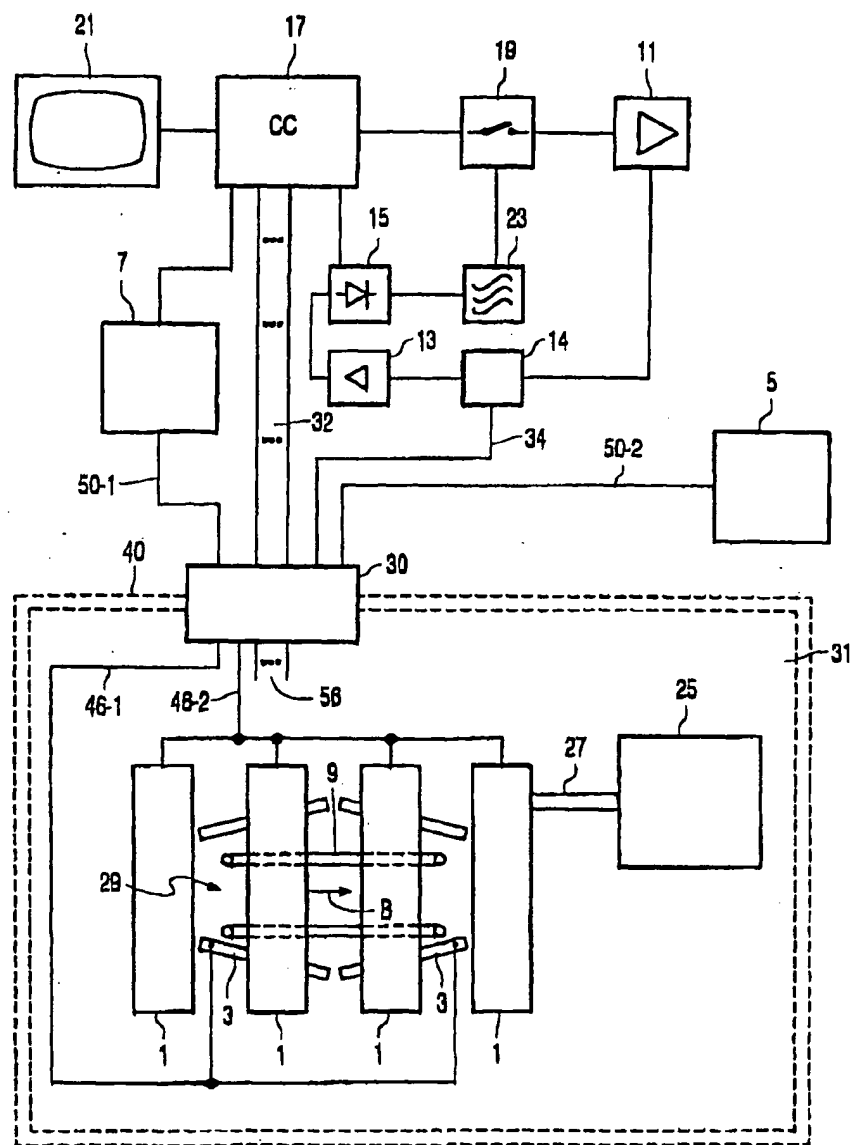


FIG. 1

2/2

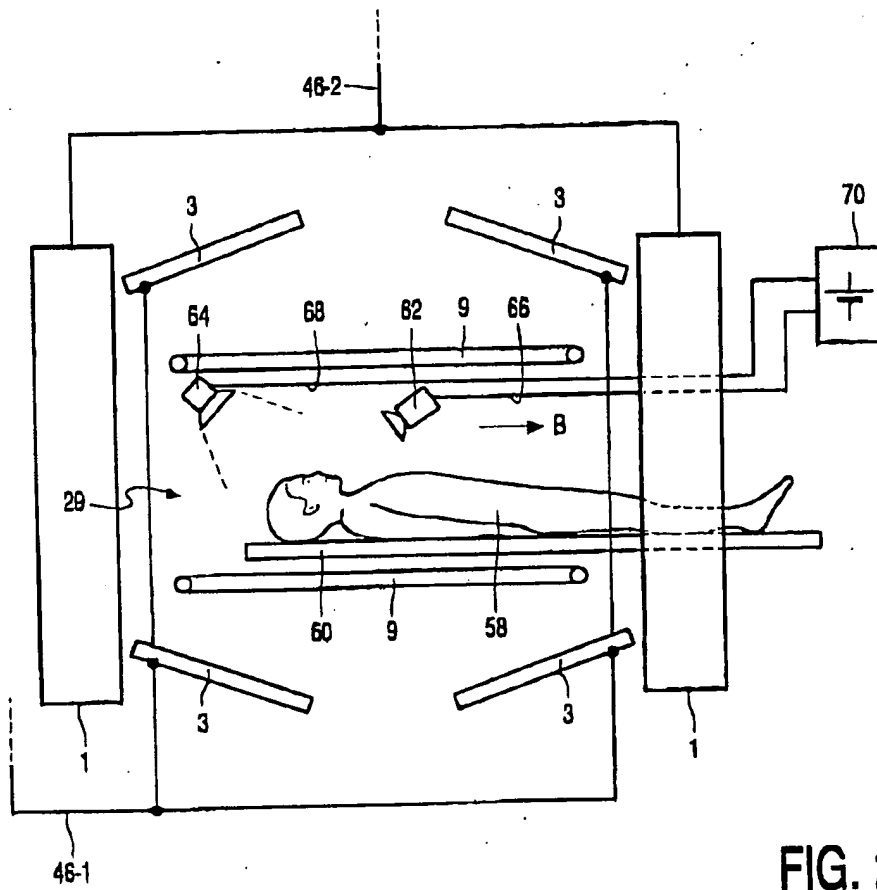


FIG. 2

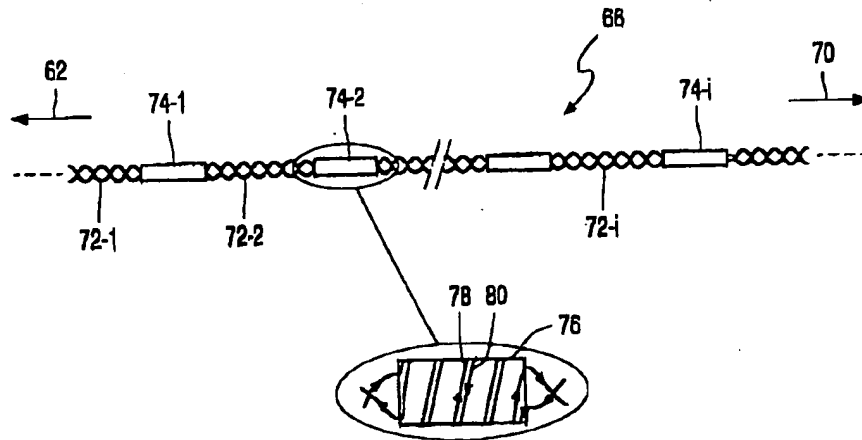


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 00/05014

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H03H1/00 G01R33/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H03H G01R A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, COMPENDEX, INSPEC, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 294 886 A (DUERR WILHELM) 15 March 1994 (1994-03-15) column 3, line 11 - column 4, line 48; figure 4 claims 2,3,7	1-5
X A	FR 2 685 989 A (DISTR APP MEDICAUX OFF) 9 July 1993 (1993-07-09) claims 1-3; figure 1	1-3,5 4
X A	DE 197 49 903 A (SIEMENS AG) 20 May 1999 (1999-05-20) column 2, line 4 - line 13 column 3, line 3 - line 50	1-3,5 4

-/-

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"B" document member of the same patent family

Date of the actual completion of the international search

26 October 2000

Date of mailing of the international search report

06/11/2000

Name and mailing address of the ISA

European Patent Office, P.B. 6818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Skalla, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/05014

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 951 672 A (BUCHWALD RANDALL H ET AL) 28 August 1990 (1990-08-28) column 2, line 7 - line 11 column 2, line 33 - line 39 column 2, line 58 - column 3, line 35; claim 1	1,2
A	LAUDON M K ET AL: "MINIMIZING INTERFERENCE FROM MAGNETIC RESONANCE IMAGERS DURING ELECTROCARDIOGRAPHY" IEEE TRANSACTIONS ON BIOMEDICAL ENGINEERING, US, IEEE INC. NEW YORK, vol. 45, no. 2, 1 February 1998 (1998-02-01), pages 160-164, XP000732848 ISSN: 0018-9294 Section III figures 2,3	1,5
A	US 5 782 241 A (BOESCH CHRIS ET AL) 21 July 1998 (1998-07-21) column 3, line 30 - line 60; figure 2	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/06014

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5294886 A	15-03-1994	DE 4113120 A JP 5180920 A	05-11-1992 23-07-1993
FR 2685989 A	09-07-1993	WO 9314565 A	22-07-1993
DE 19749903 A	20-05-1999	NONE	
US 4961672 A	28-08-1990	NONE	
US 5782241 A	21-07-1998	FR 2704131 A DE 69421914 D DE 69421914 T EP 0695139 A ES 2141227 T WO 9423648 A JP 2945480 B JP 8508898 T	28-10-1994 05-01-2000 20-07-2000 07-02-1996 16-03-2000 27-10-1994 06-09-1999 24-09-1996